


The KP Pushbutton allows for easy sampling of pressurized systems by pushing a button. The push button style eliminates the need for probes and cross contamination risks. To sample, hold the bottle under the spout of the button and then push.

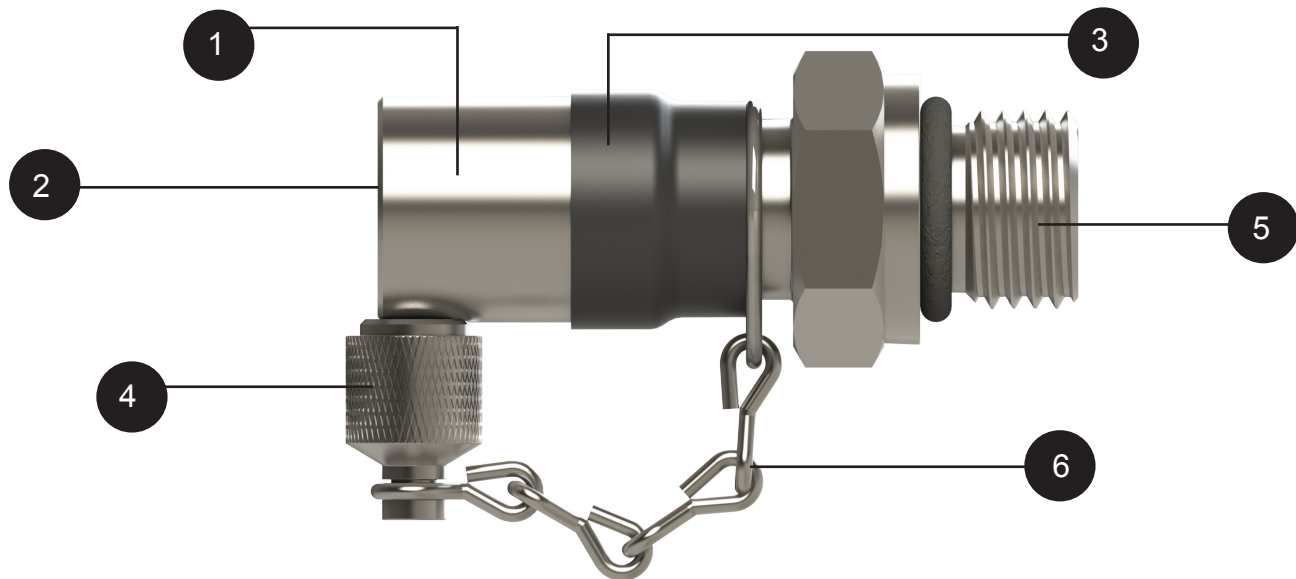

Features

1. Unique 360° rotating spout offers convenient sampling and installation without swivel fittings
2. Push button style valve: push to open valve, release to automatically close valve
3. Weather sleeve
4. Rugged spout design with easy to grip knurled cap
5. Variety of thread options for direct installation
6. Corrosion resistant stainless steel chain and clip with no exposed springs

Benefits

- No probes needed
- Low purge volume
- Patented elastomeric vacuum tight seals
- Automatic valve shut off

To Order

info@LubeTechnology.com
413-788-LUBE(5823)

Options

- Locknut for added safety against vibration
- Silicon pad for high temperature environments
- Coloured weather sleeve bands for easy identification

Applications

Transmissions | Compressors | Engines
Hydraulics | Coolant | Turbines

KP Specifications

Sampling Pressure	5 - 750 psi (0.03 - 5.17 MPa)
Working Pressure	6000 psi (41.4 MPa)
Seal Material	Nitrile (Buna N), Viton (FKM), Neoprene (SBR)
Valve Material	Carbon Steel, Brass
Valve Plating	Zinc Nickel

