

PRA-20/25/30 OIL PNEUMATIC PUMP



Technical Features

DISCHARGE/CYCLE	13 CC
WORKING PRESSURE	30 bar (425 PSI) MAX
RATIO	4.5 ÷ 1
AIR OPERATING PRESSURE	FROM 4 bar TO 7 bar FROM 60 PSI TO 100 PSI
RELEASE VALVE	0.7 bar (10 PSI)
CYCLES NUMBER/MINUTE	MAX 4
RESERVOIR	2 L – 3.6 L – 6 L – 5 L
SUCTION STRAINER	250 MICRON
PRESSURE GAUGE	0-60 bar / 0-850 PSI
DISCHARGE PORT	M12x1 - TUBE 6 MM
TEMPERATURE RANGE	FROM - 10°C TO + 80°C
LUBRICANTS	OIL 50-1000 cSt 40°C
LOW LEVEL SWITCH	1.5 A 250 V AC – 150 V DC
AIR INLET	1 / 4" G




Codes For Order

CODE	TYPE	RESERVOIR CAPACITY
00.223.1	PRA-20 NY	2 L NYLON
00.226.1	PRA-25 NY	3.6 L NYLON
00.227.0	PRA-30 NY	6 L NYLON
00.226.4	PRA-25 LA	5 L METALLIC

Overall Dimension

PUMP	A	B	C	D	E	F
PRA-20 NY	160	186	242.5	125	123	148
PRA-25 NY	155	181	237.5	172.5	135	230
PRA-30 NY	250	276	332.5	172.5	135	230
PRA-25 LA	156	182	238.5	172.5	153	236

NYLON RESERVOIR

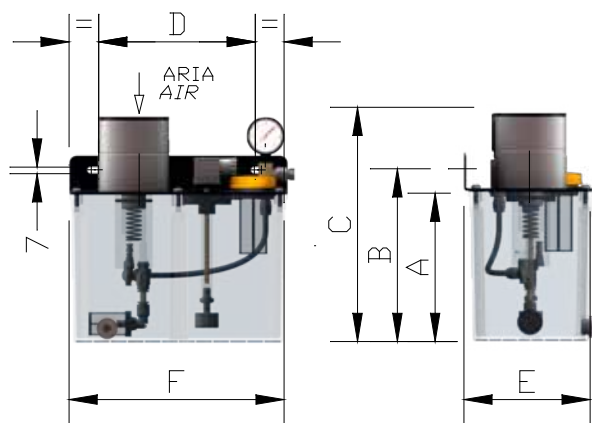

METALLIC RESERVOIR

