


OIL MPT-200/LAM ELECTRIC PUMP

These pumps can be used in small - medium machines with a restrict points number.

Technical Features

DISCHARGE/MINUTE	100 CC
WORKING PRESSURE	5 - 25 bar (70-354 PSI) ADJUSTABLE
RELEASE VALVE	0.7 bar
RESERVOIR	8 L - 12 L - 50 L
SUCTION STRAINER	250 MICRON
PRESSURE GAUGE	0 - 60 bar / 0 - 870 PSI
DISCHARGE PORT	M12X1 TUBE 6mm
TEMPERATURE RANGE	FROM -20°C TO +80°C
LUBRICANTS	OIL 50 - 1000 cSt 40°C
LOW LEVEL SWITCH	1.5 A 250 V AC 200 V DC 50 W
MOTOR	SEE TABLE AT PAGE 20

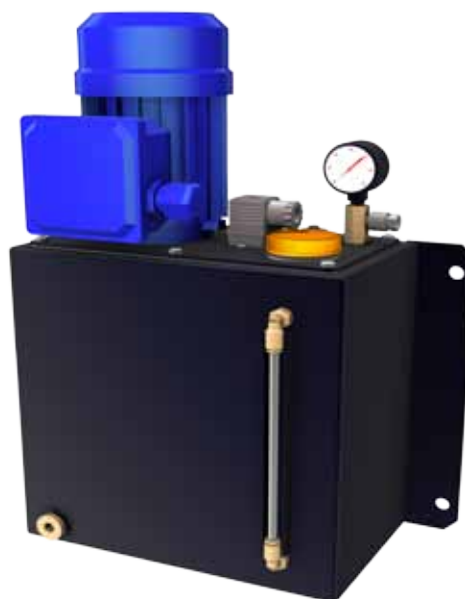

Codes For Order

CODE	PRESSURE	TYPE	RESERVOIR CAPACITY
60.821.4	5 - 25 bar	MPT-6 LA-200-25	8 L
60.821.5	5 - 25 bar	MPT-12 LA-200-25	12 L
60.821.6	5 - 25 bar	MPT-50 LA-200-25	50 L

On request can be supplied special motor voltages or single phase 115 v – 230 v ac 50/60hz. In this case add the voltage to the order code.

Overall Dimension

PUMP	A	B	C	D	E	F	WEIGHT
MPT-6- LA	250	205	430	305	173	330	10 KG
MPT-12-LA	250	205	430	330	196	355	12 KG
MPT-50-LA	400	300	580	530	270	560	18 KG

