

## PRA-20/25/30/G SOFT GREASE PNEUMATIC PUMP

## Technical Features

DISCHARGE/CYCLE	13 CC
WORKING PRESSURE	30 bar (425 PSI) MAX
RATIO	4.5 ÷ 1
AIR OPERATING PRESSURE	FROM 4 bar TO 7 bar
	FROM 60 PSI TO 100 PSI
RELEASE VALVE	0.7 bar (10 PSI)
CYCLES NUMBER/MINUTE	MAX 4
RESERVOIR	2 L – 3.6 L – 6 L – 5 L
SUCTION STRAINER	250 MICRON
PRESSURE GAUGE	0-60 bar / 0-850 PSI
DISCHARGE PORT	M12x1 - TUBE 6 MM
TEMPERATURE RANGE	FROM - 10°C TO + 80°C
LUBRICANTS	SOFT GREASE NLGI 000 - 00
LOW LEVEL SWITCH	FROM 10 TO 40 V DC
AIR INLET	1 / 4" G




## Codes For Order

CODE	TYPE	RESERVOIR CAPACITY
00.228.0	PRA-20-G NY	2 L NYLON
00.228.1	PRA-25-G NY	3.6 L NYLON
00.228.2	PRA-30-G NY	6 L NYLON
00.226.0	PRA-25-G LA	5 L METALLIC

## Overall Dimension

PUMP	A	B	C	D	E	F
PRA-20-G NY	160	186	242.5	125	123	148
PRA-25-G NY	155	181	237.5	172.5	135	230
PRA-30-G NY	250	276	332.5	172.5	135	230
PRA-25-G LA	156	182	238.5	172.5	153	236

## NYLON RESERVOIR

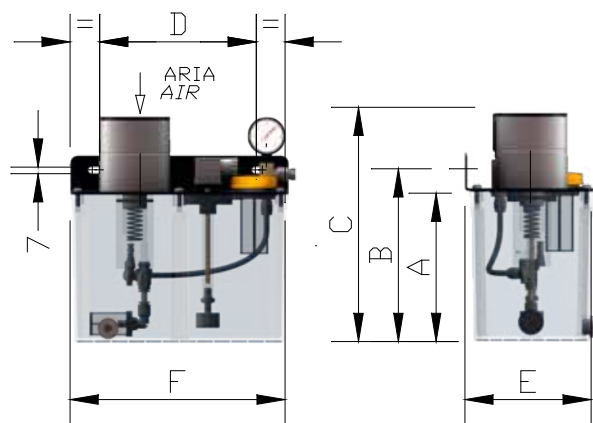

## METALLIC RESERVOIR

