



**GREASE ELECTRIC PUMP ILC-MAX-G 5 (12/24 V DC – 24 V AC)**

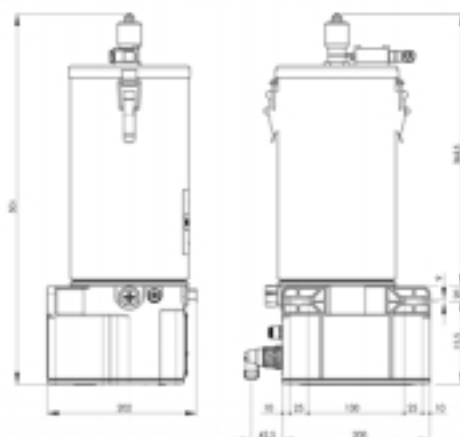

**GREASE ELECTRIC PUMP ILC-MAX-G 5 (115/230 V AC)**

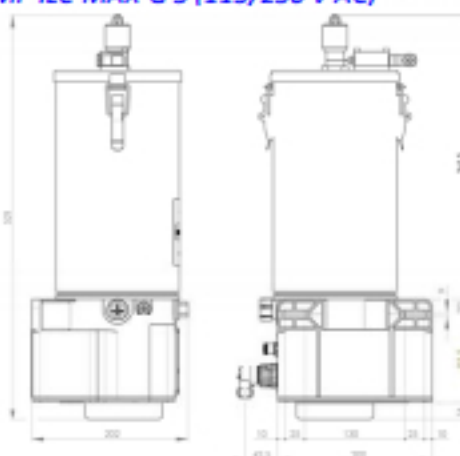

**TECHNICAL DATA**

NUMBER OF OUTLETS	FROM 1 TO 3
DISCHARGE/ROPE WITH FIXED PUMPING ELEMENT	0.16 CC
DISCHARGE/ROPE WITH ADJUSTABLE PUMPING ELEMENT	0.01 – 0.16 CC
RPM	23 rpm (12 V DC) • 22 rpm (24 V DC) • 29 rpm (230 V AC) • 31 rpm (115 V AC)
DISCHARGE/MIN WITH FIXED PUMPING ELEMENT	3,68 cm <sup>3</sup> (12 V DC) / 3,52 cm <sup>3</sup> (24 V DC) / 4,64 cm <sup>3</sup> (230 V AC) / 4,96 cm <sup>3</sup> (115 V AC)
DISCHARGE/MIN WITH ADJUSTABLE PUMPING ELEMENT	0,23 – 3,68 cm <sup>3</sup> (12 V DC) / 0,22 – 3,52 cm <sup>3</sup> (24 V DC) / 0,29 – 4,64 cm <sup>3</sup> (230 V AC) / 0,31 – 4,96 cm <sup>3</sup> (115 V AC)
SUITABLE LUBRICANTS	GREASE NLGI 1 and 2 CONSISTENCY
MAX. COUNTERPRESSURE	275 BAR (3993 PSI) ±10%
RESERVOIR CAPACITY	5 KG • METALLIC
TEMPERATURE	FROM + 20 °C TO + 80 °C
OUTLET CONNECTION	1 / 4" G
LOW LEVEL SWITCH	5A – 250 V AC / 0.4 A • 125 V DC – NC o NO contact

